


U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Index No. X-13

State of Wisconsin }
 County of Forest } ss.

I, Gary L. Pisoni, do hereby
 certify that on the 12th day
 of May, 1994, I found
 evidence of the East Quarter
 corner of Section 33
Township 38, North, Range
14 East, Fourth Principal Meridian,
 as described hereon; and that from this evidence
 I established a new monument and accessories
 as described hereon to perpetuate the original
 location of this corner.

Resident witnesses:

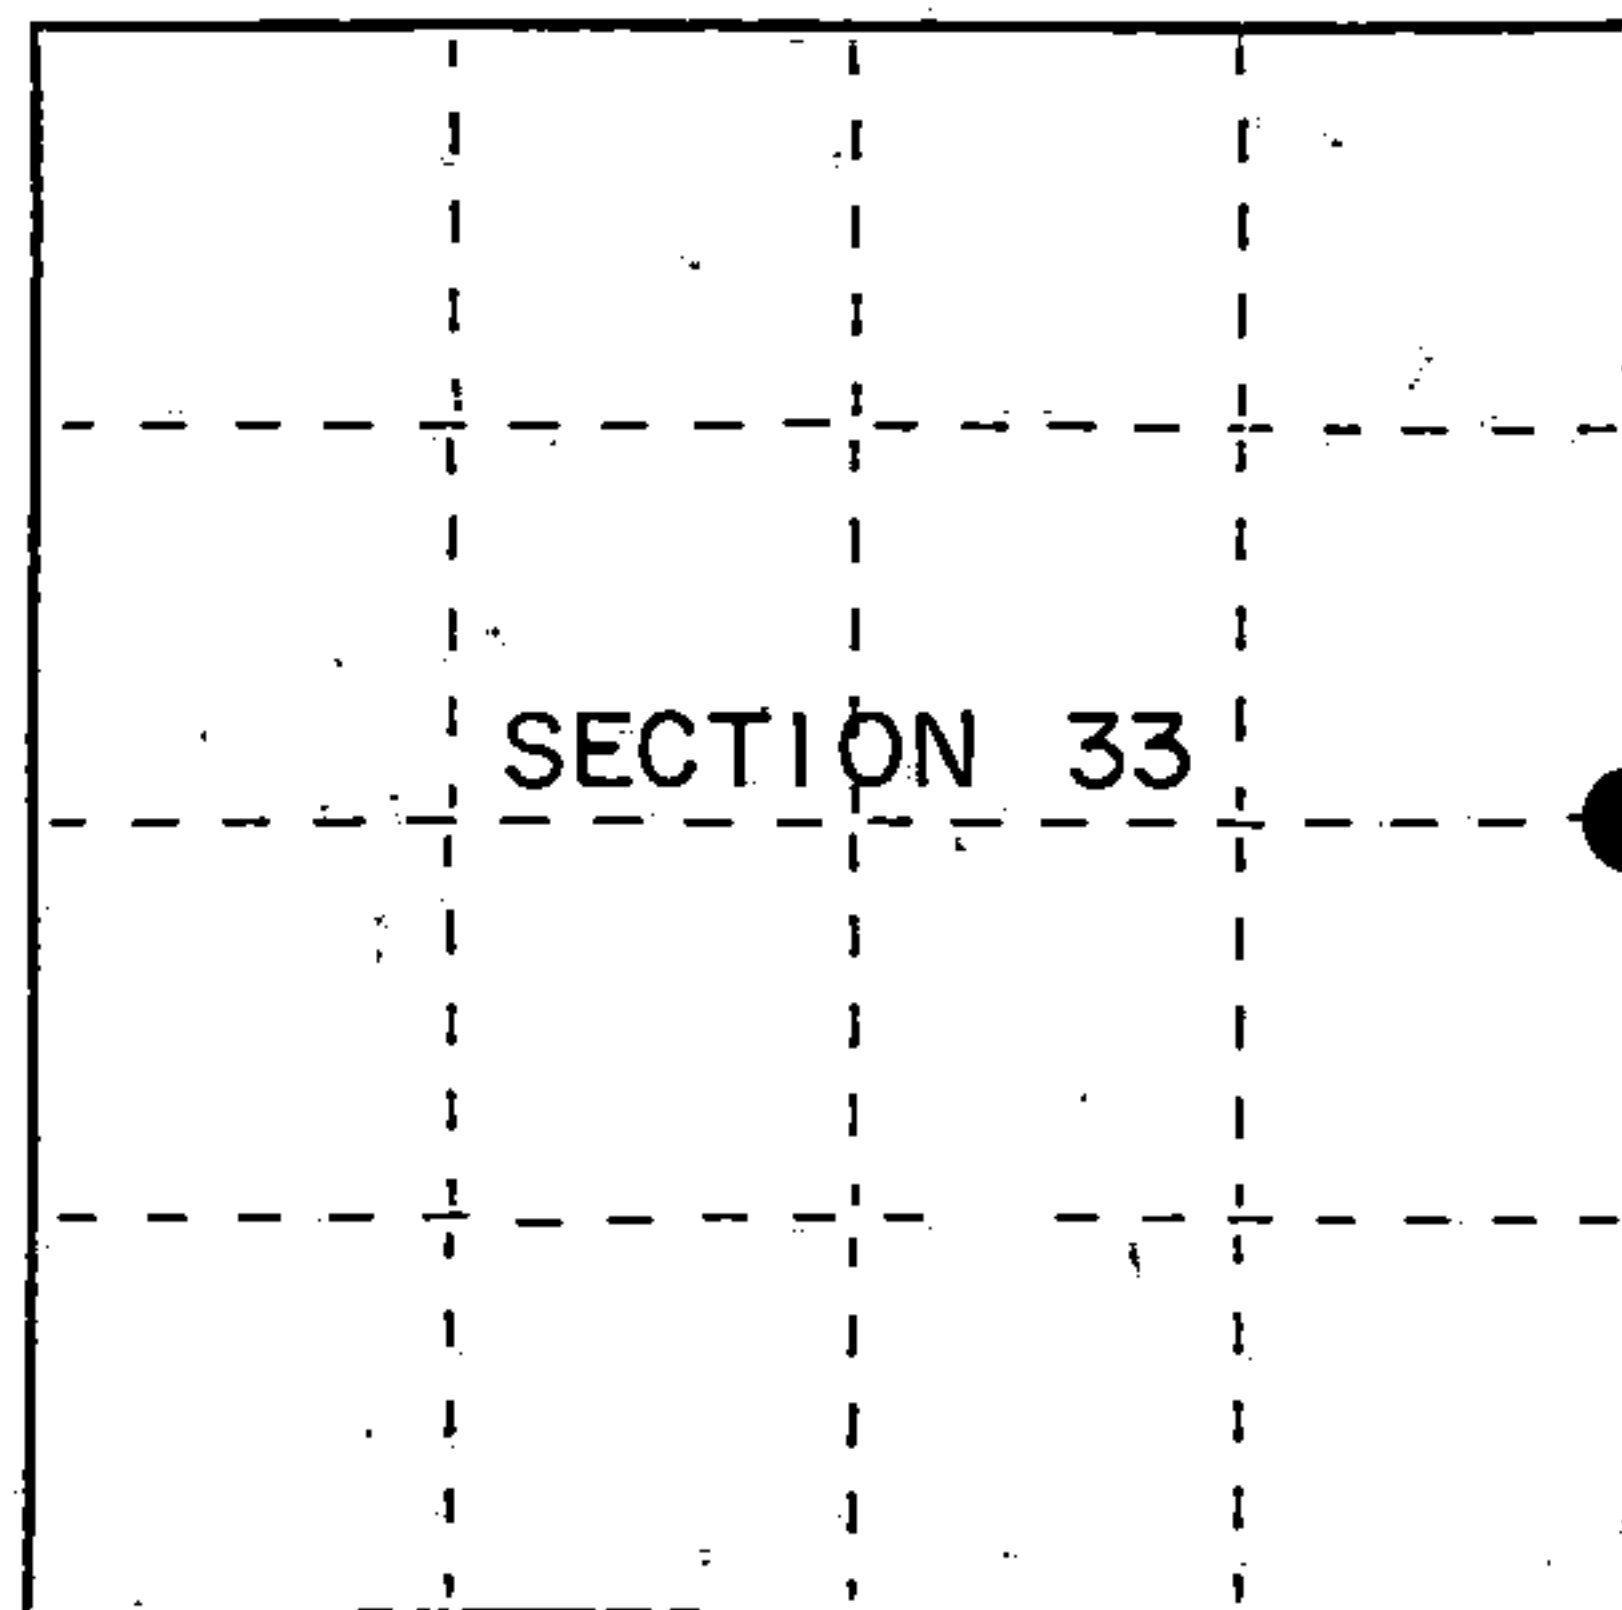

● = Corner monument restored.

History of original corner establishment:

Original Government Survey in 1865 by James L. Nowlin. North between Sections 33 and 34,
 at 40.00 chains, set Quarter Section Post, from which the following bear; Cedar, 12",
 S45°W, 13 lks., Cedar, 6", S45°E, 8 lks.

Description of corner evidence found:

No corner evidence was recovered.

I restored the corner position at proportionate distance and on line between the
 Northeast and Southeast Section Corners of Section 33.

Description of monument and accessories I established to perpetuate the original location of this corner.

At the corner position, set a 2½" x 36" aluminum pipe monument, with an aluminum cap
 stamped; T38N, R14E, 1/4, S.33, S.34, 1994, S-1634. Blazed and scribed the following new
 bearing trees; (Measurements are taken to a nail in side of tree)

Sugar Maple	8"	N21°E	8.98 feet
Sugar Maple	8"	S29°E	64.20 feet
Sugar Maple	14"	S38°W	13.08 feet
Sugar Maple	9"	S71°W	27.82 feet
Steel Sign Post		S70°E	0.84 feet

Dated at Iron River, MI ~~Wisc~~ this 5th day of March, 1995

Signature Gary L. Pisoni Title Land Surveyor Registration No. S-1634
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Forest, I hereby certify that the within
 instrument was filed in this office for record on the 20th day of March, 1997
 at 1:30 o'clock P M.

(Register of Deeds)

By [Signature] Deputy

FORM NO. 985-A

H.C. Miller Company
 Surveyors - Wisconsin

Stock No. 26273

158151


43814322000

- (d) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None

- (f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

- (g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?
Re-established through lost corner proportionate methods.

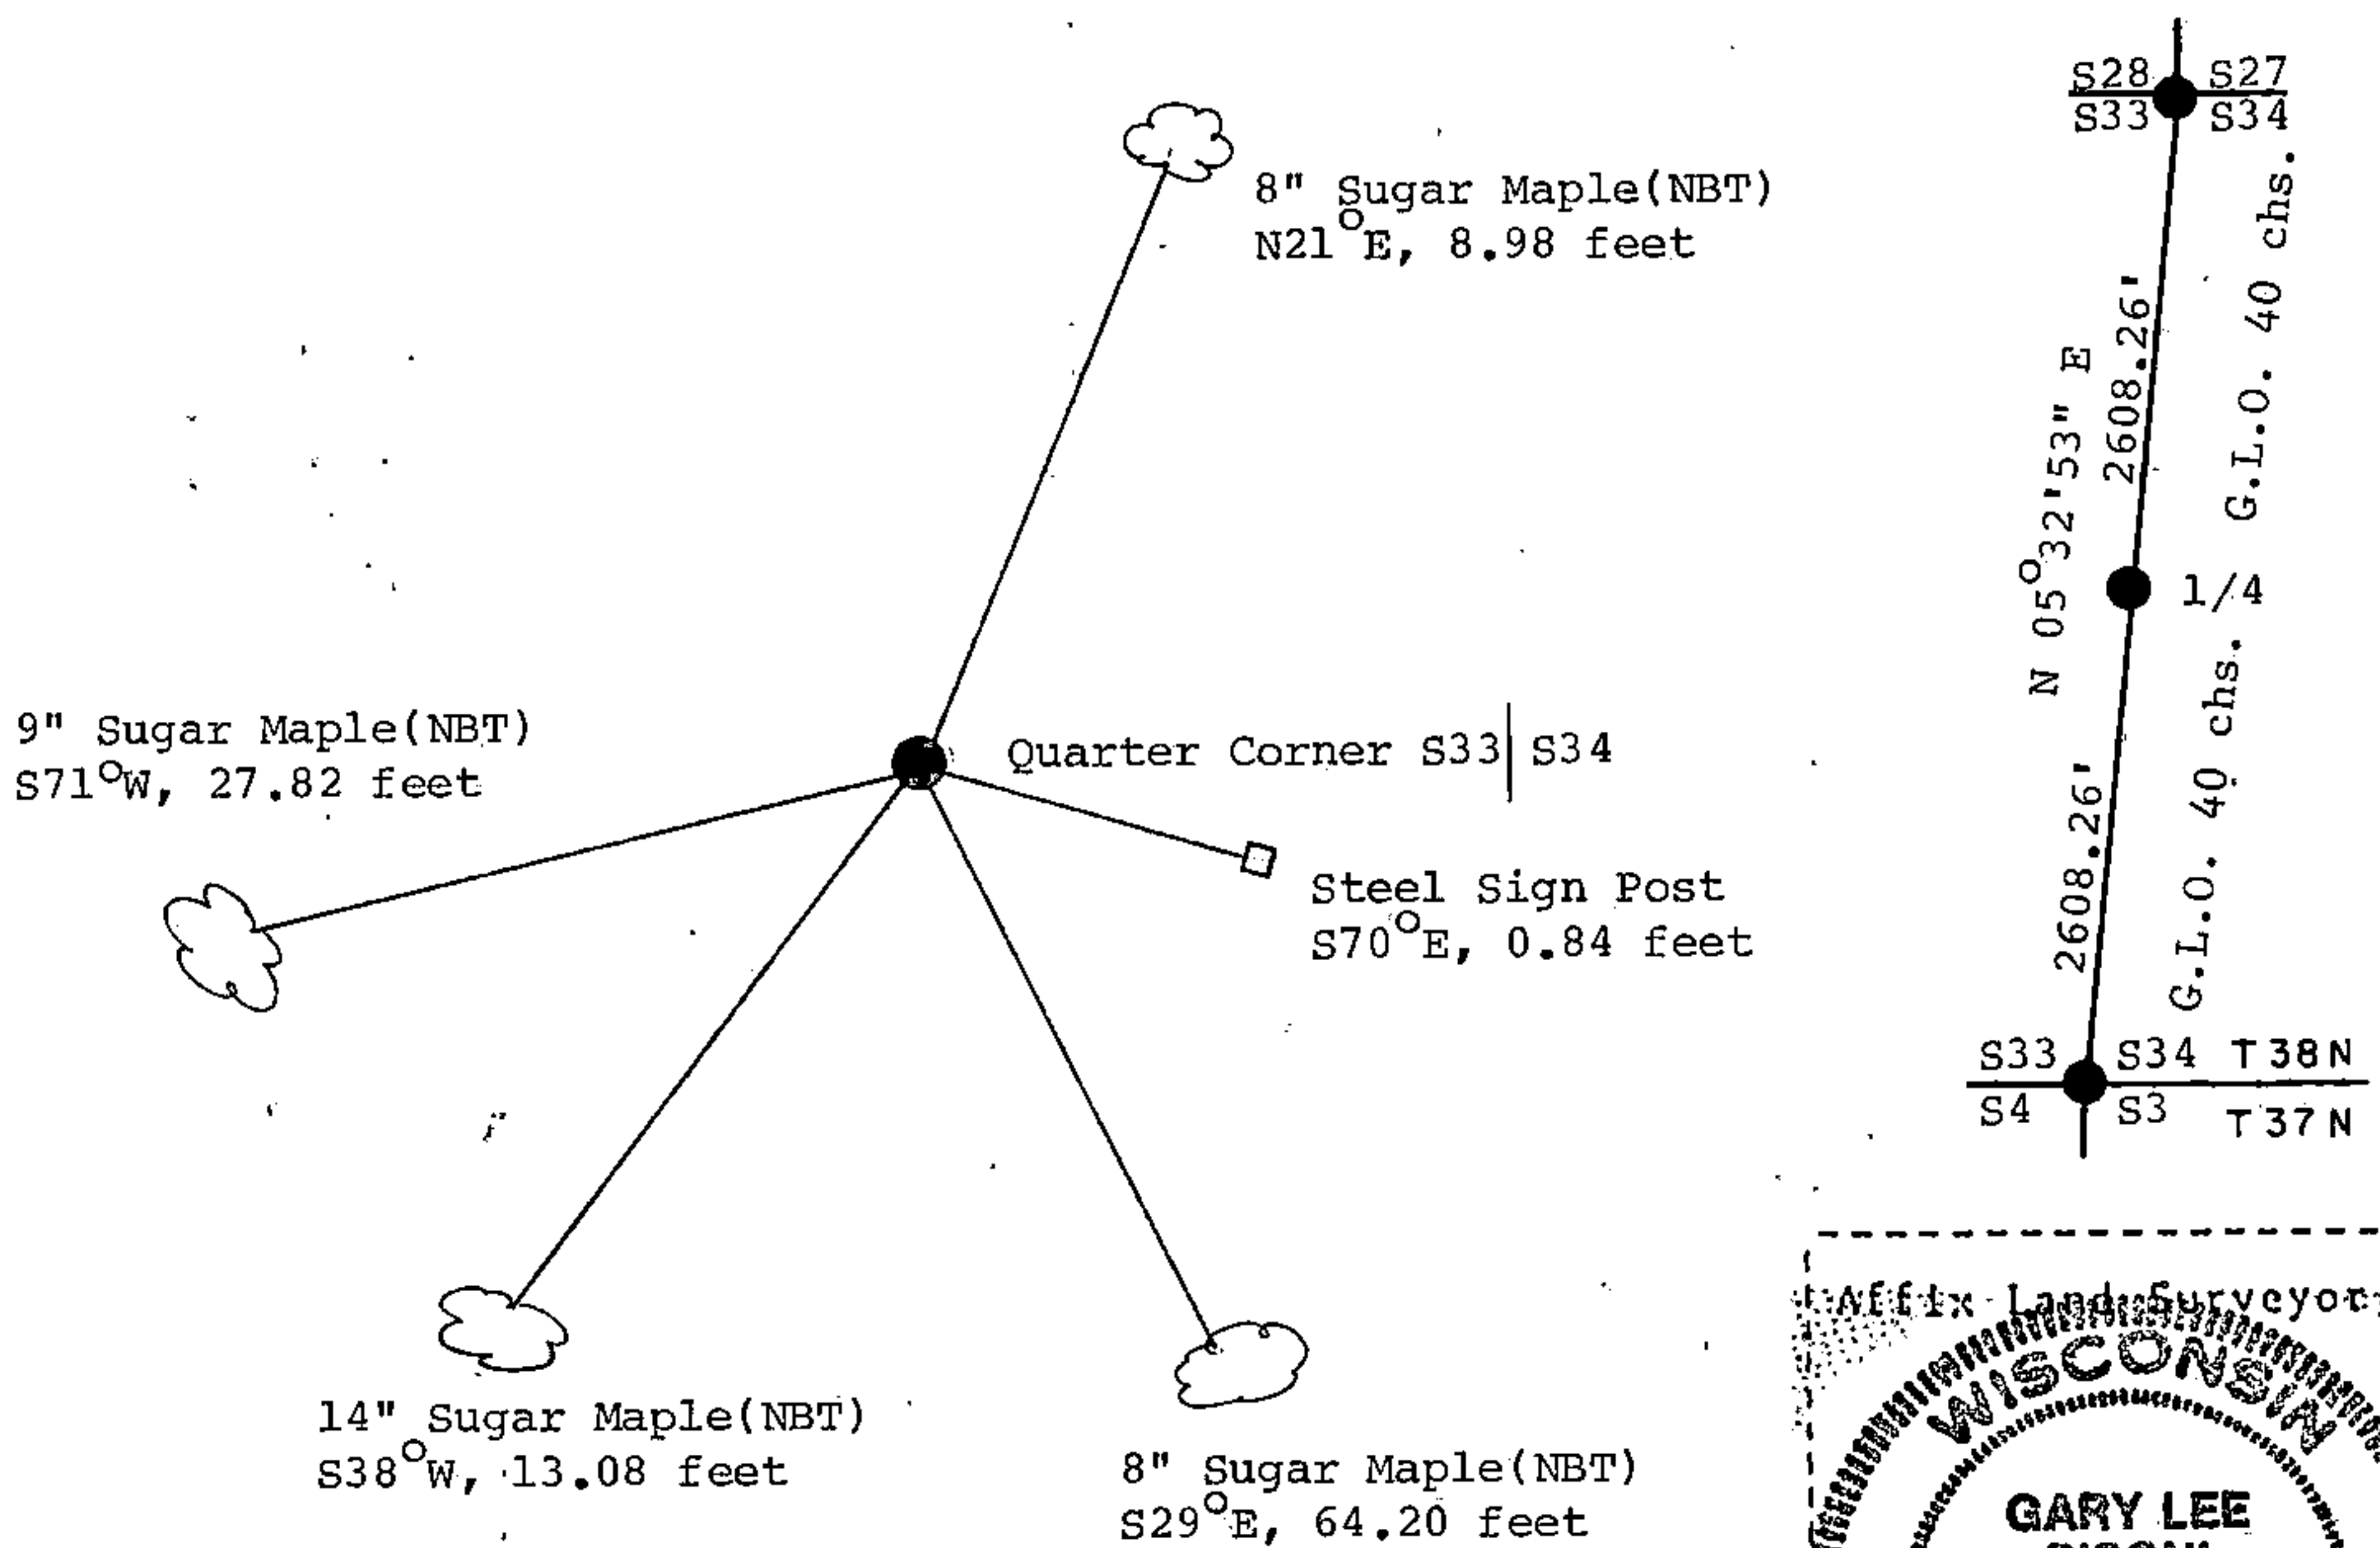

- (i) I, Gary L. Pisoni
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature

Date

Gary L. Pisoni

4-10-95