

CERTIFIED LAND CORNER RESTORATION



Index No. K-14

X14

State of Wisconsin }
County of Forest } ss.

I, Daniel K. Pleoger, do hereby
certify that on the 4th day
of March, 1981, I ~~found~~
~~established~~ W.C. 1/16
corner of section 34
Township 37, North, Range
14E, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

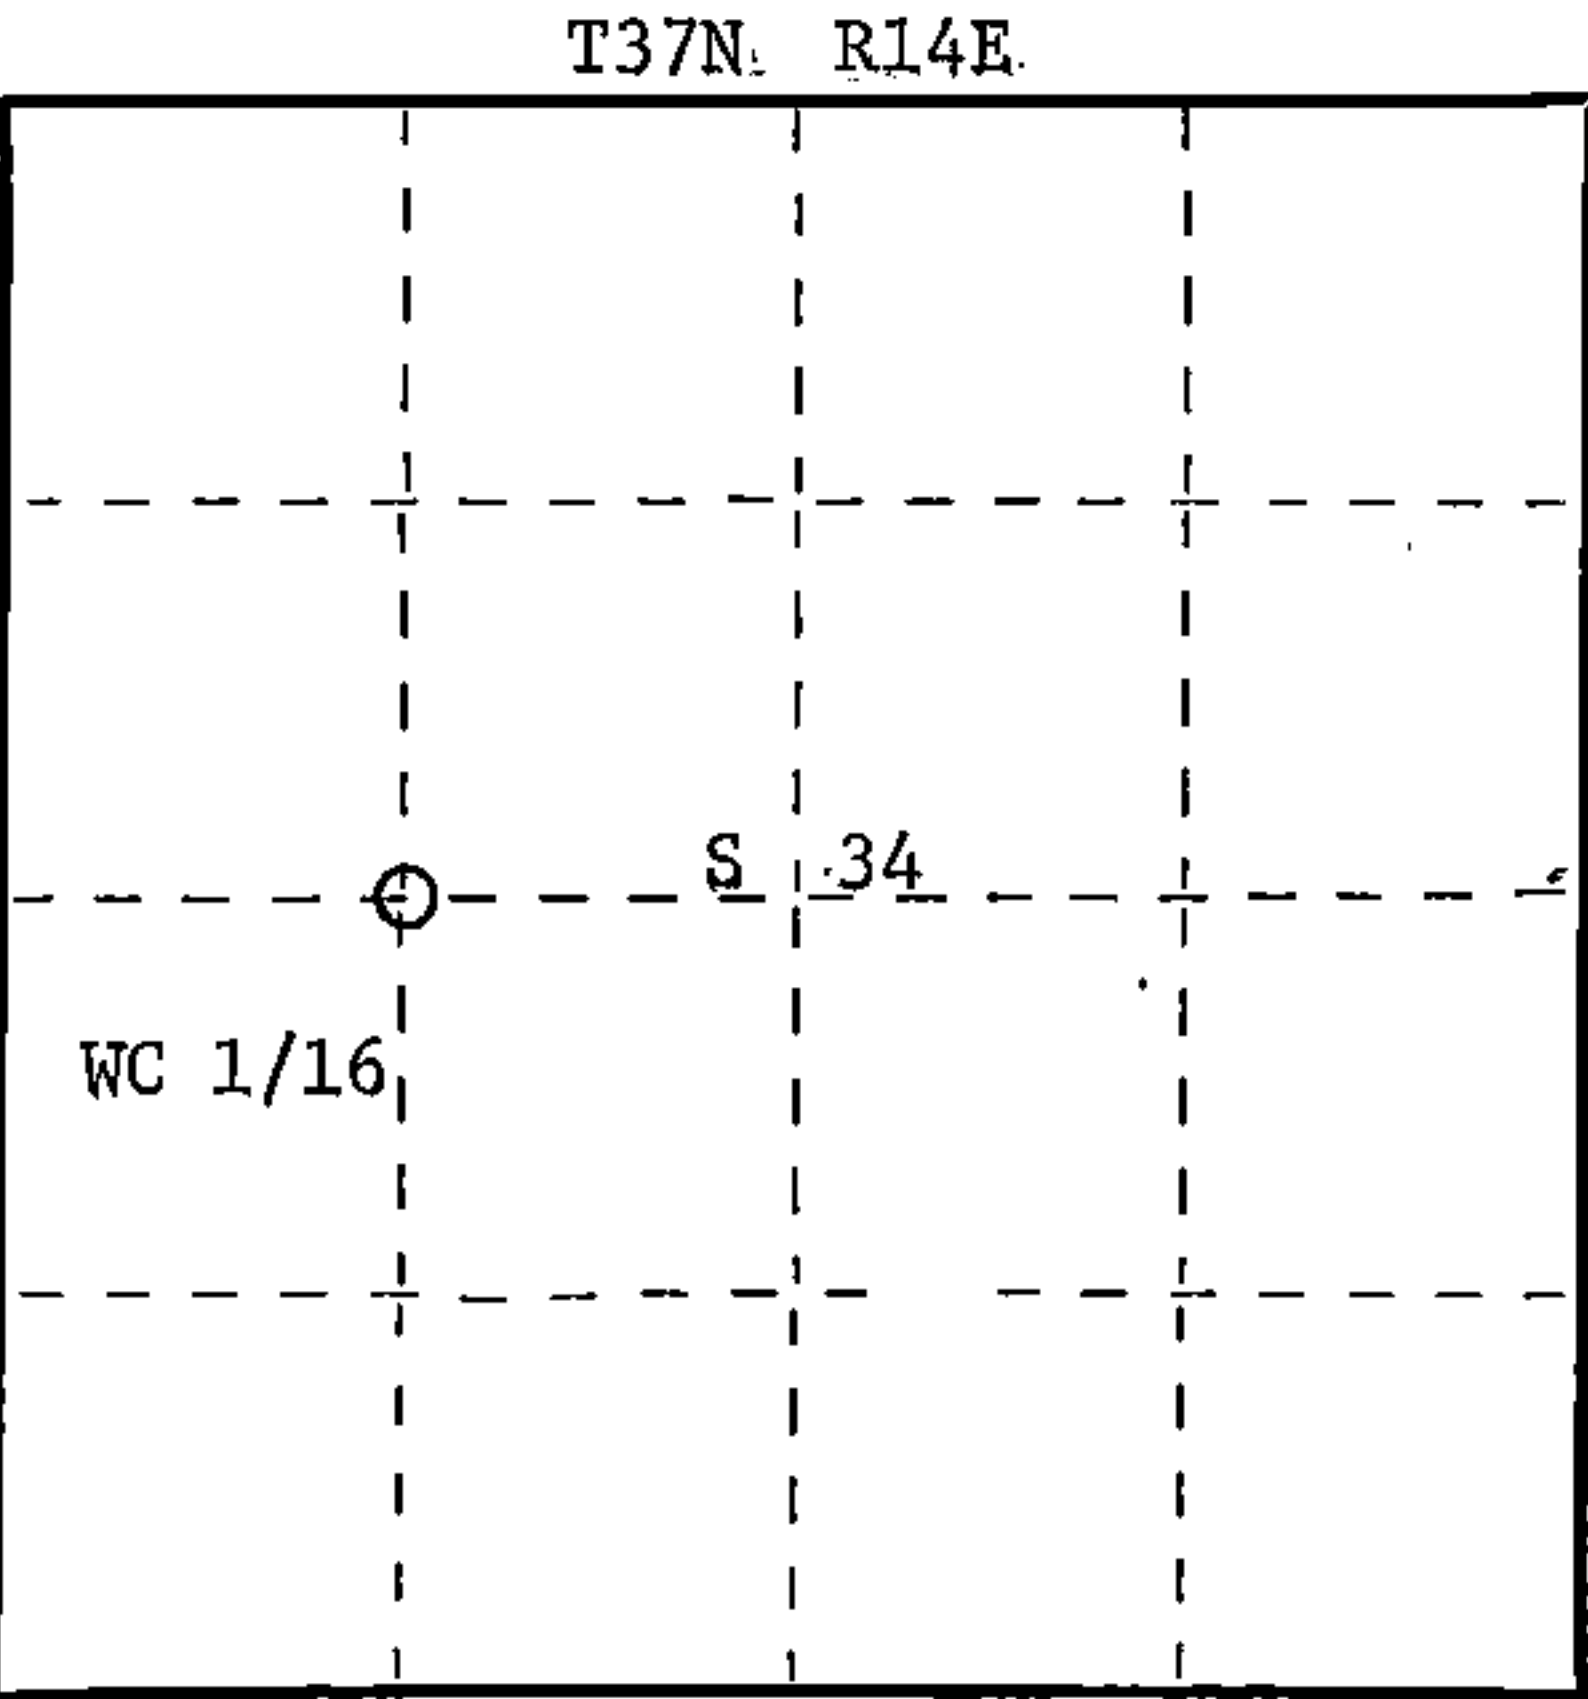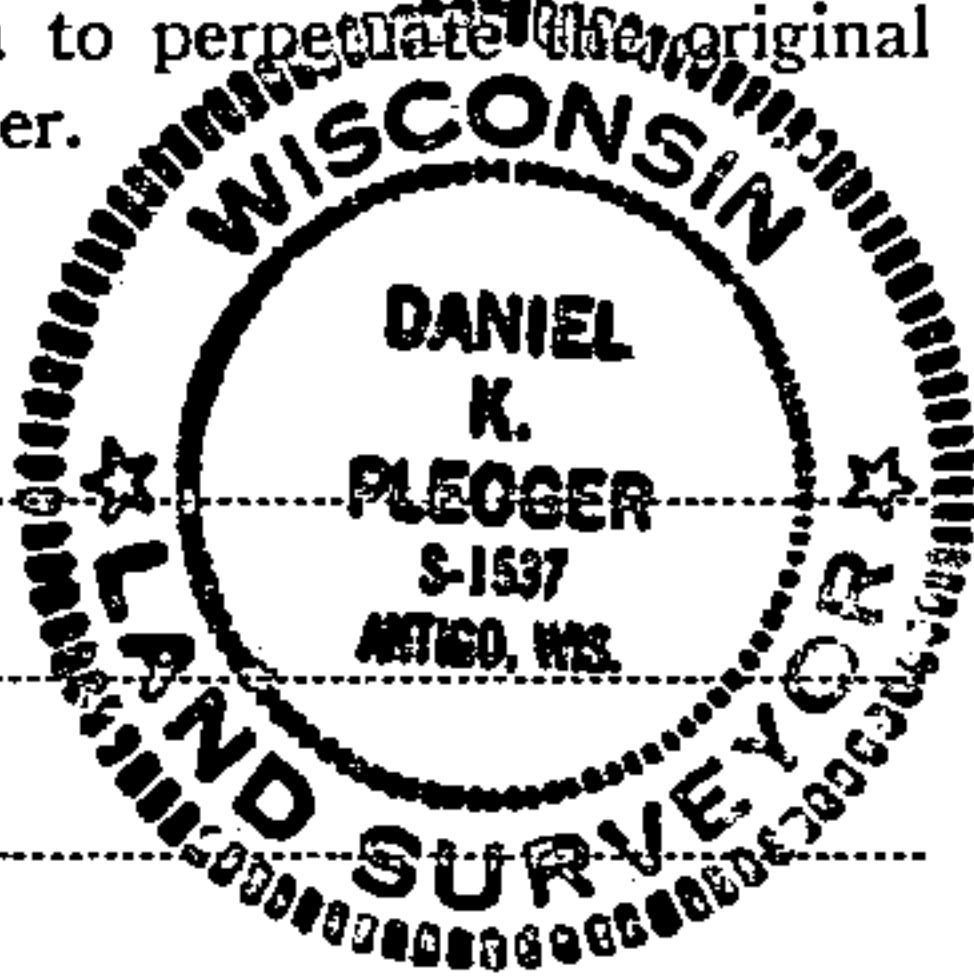

○ = Corner monument restored.

History of original corner establishment:

No evidence of any previous corner.

Description of corner evidence found:

Total distance from 1/4 corner between sections 33 and 34 to C 1/4 corner section 34
is 2627.205 feet at bearing S89-06-46E.
Set W.C. 1/16 1313.602 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" iron pipe with 2" diameter brass cap - stamped:
Witness Corner sets west 20 feet of true corner.
Drove a 1" x 18" iron pipe 4" below ground surface on west edge of
N-S town road for true corner.

Marked NBT's to true corner:
White Spruce 7" S65°E 22.25 feet
White Spruce 6" N59°E 25.94 feet
scribed 1/16 - B.T.

T37N R14E
WC 1/16 S 34
E. 20 ft. to cor.
S1537-1981

Dated at Rhineland, Wis., this 23rd day of June, 1981

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Forest, I hereby certify that the within
instrument was filed in this office for record on the 1st day of July, 1981
at 8:30 o'clock A. M.

(Register of Deeds)

By _____ Deputy

DOCUMENT NO.
120043