


State of Wisconsin }
County of Forest } ss.

I, Thomas R. Arnott, do hereby
certify that on the 21 day
of Oct., 1976, I found
evidence of the section
corner of sec. 23, 24, 25, & 26
Township 37, North, Range
16 E, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

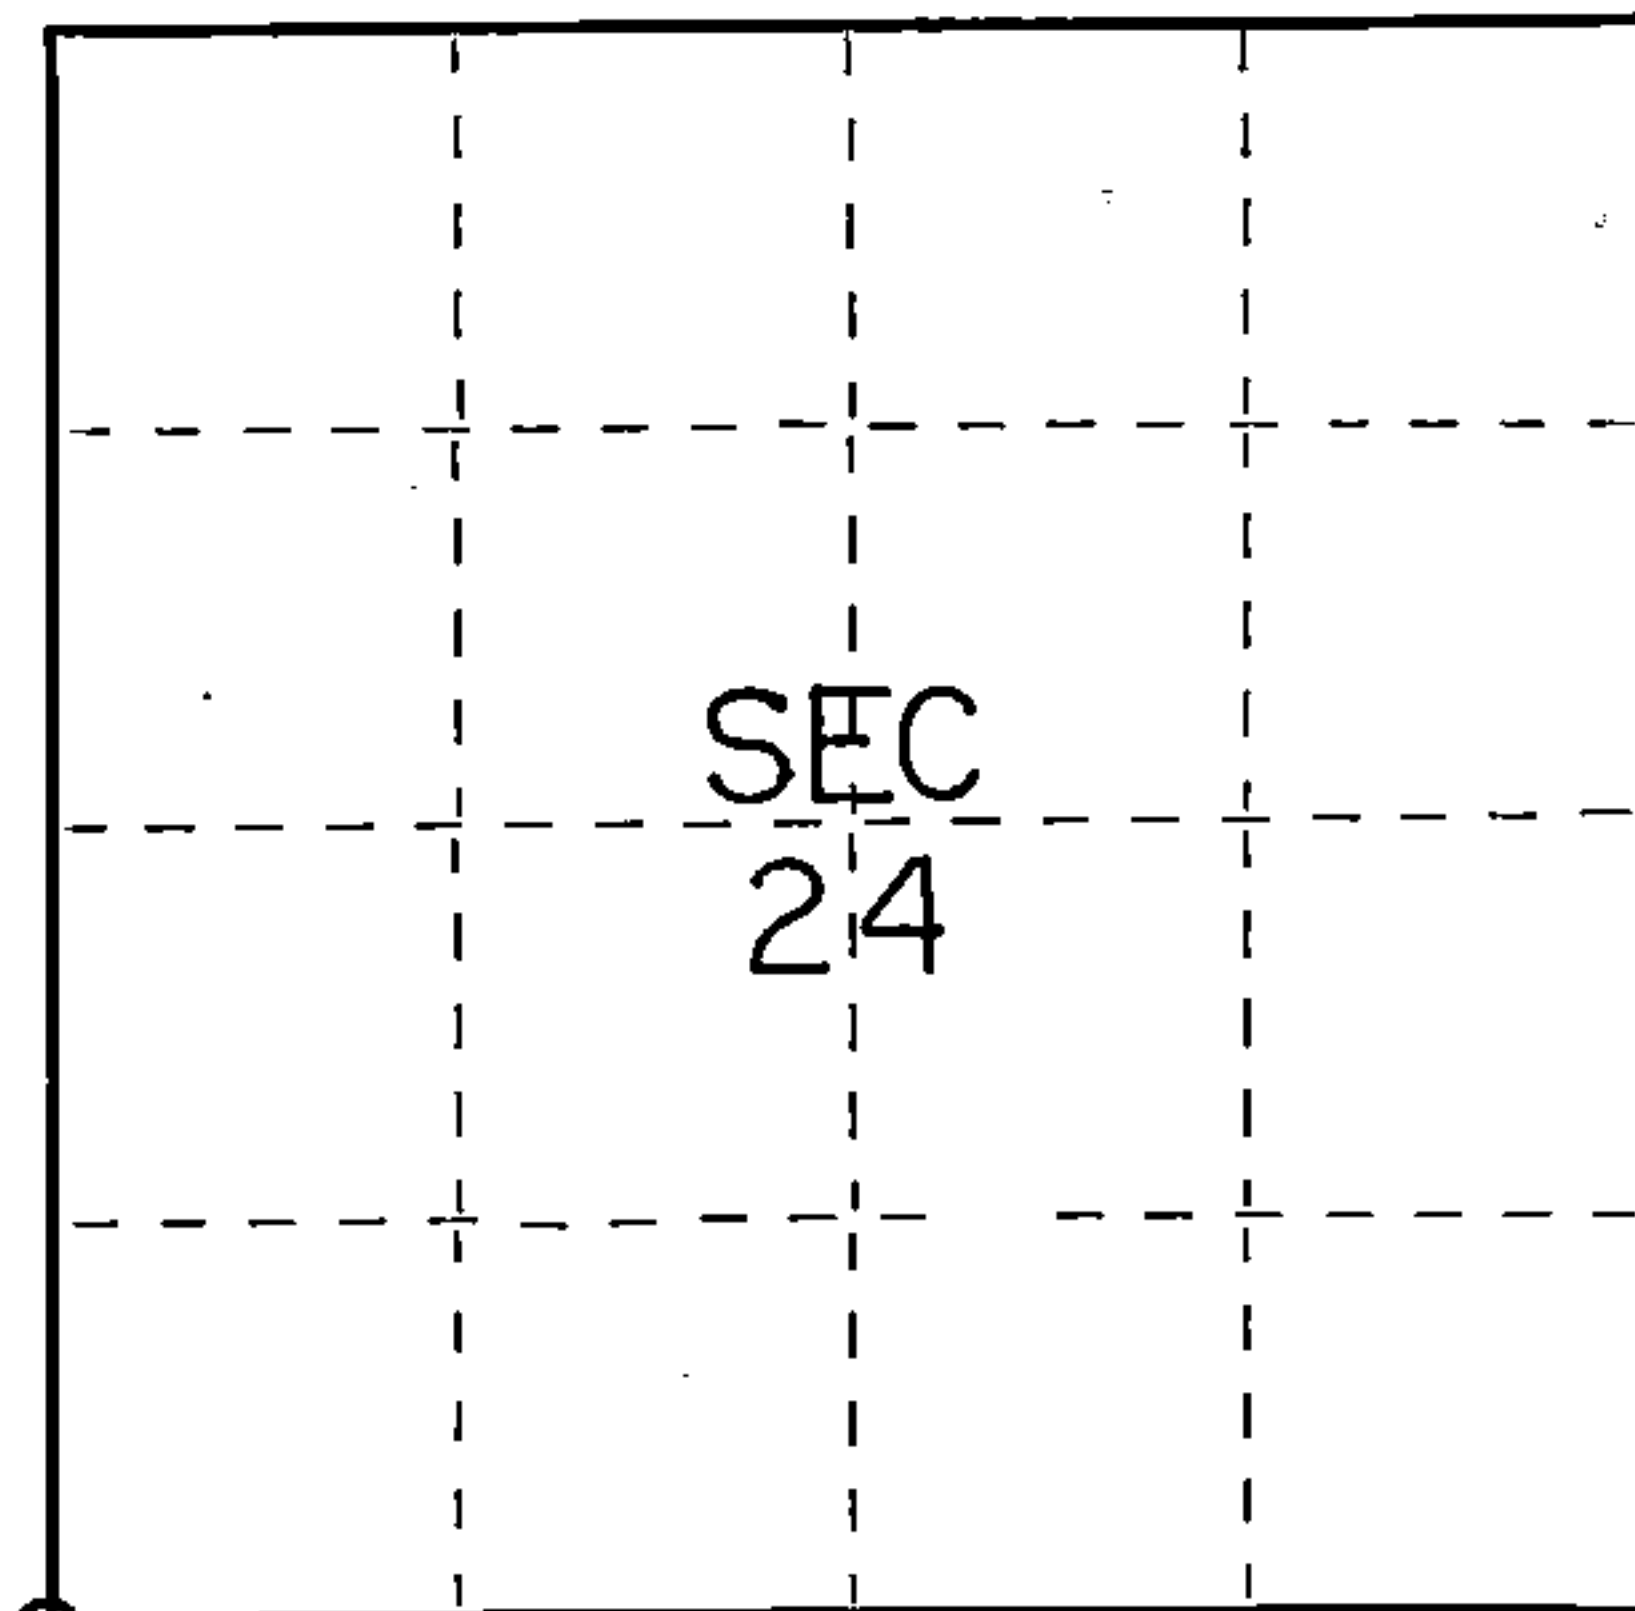

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

Index No. R21

History of original corner establishment:

Original Survey by James McBride July 11 - July 16, 1859.

W. Pine	10	N13W	8 Lks.
W. Pine	16	N75E	34 Lks.
Yel. Pine	24	S42E	24 Lks.
W. Pine	18	S75W	10 Lks.

Description of corner evidence found:

None: Set section corner after setting 1/4 corner between 25 & 26
from highway notes by doubling the distance from that corner
to an existing 1/16th corner.


Set R.R. Spike for section corner

Description of monument and accessories I established to perpetuate the original location of this corner.

Set R.R. Spike for section corner

Ties:

Forest Co. Alu. mon.	N57E	28.66 feet
NW cor tele. junction box	S35E	37.62 feet
Power Pole (40A)	N30W	41.41 feet

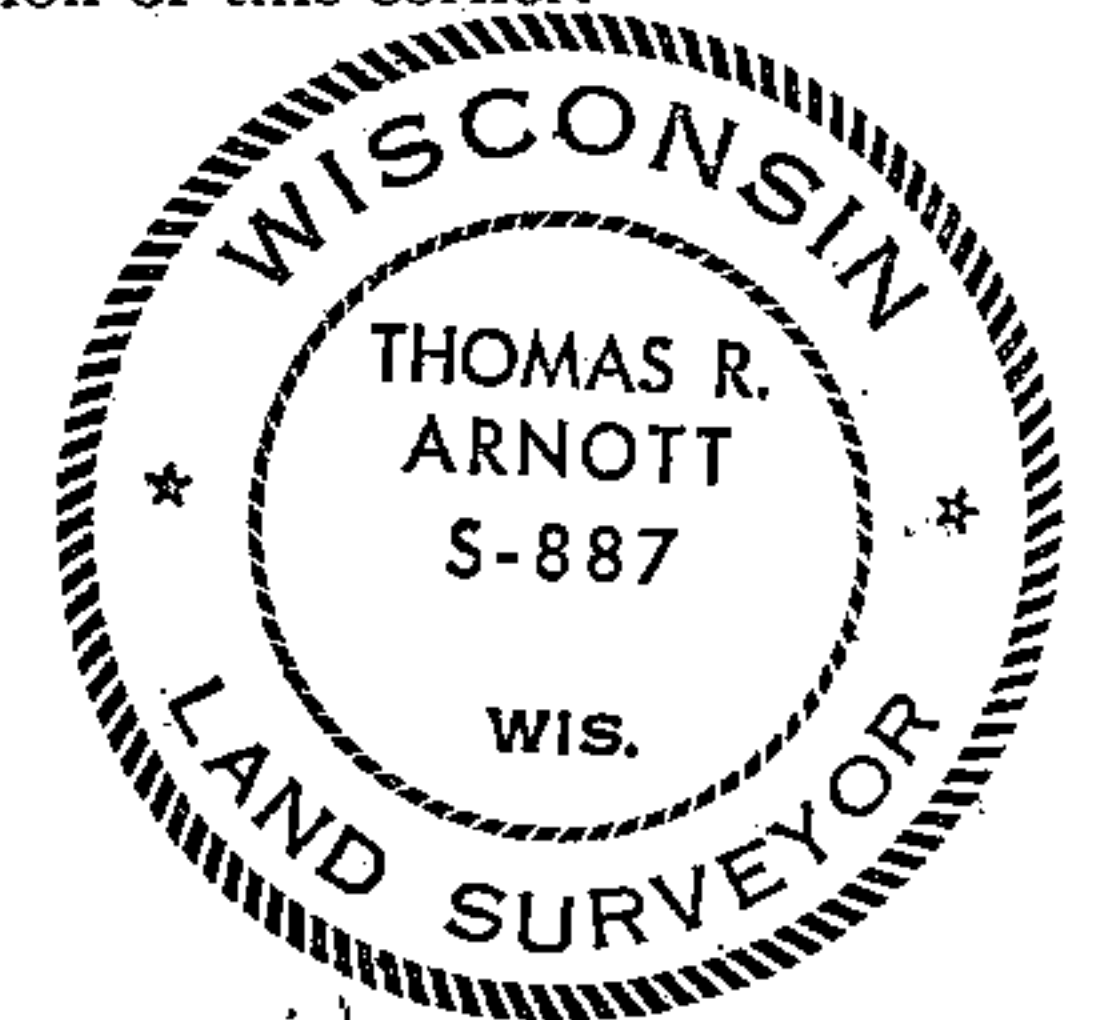

Dated at Crandon, Wis., this 26 day of Nov., 1976

Signature Thomas Arnott Title Surveyor Registration No S-887
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Forest, I hereby certify that the within
instrument was filed in this office for record on the 26 day of Nov., 1976
at 3:30 o'clock P. M.

EUGENE STATEZNY
(Register of Deeds)

Document Number 110322

By Eileen Schmidt Deputy


43716230000

ORIGINAL ON FILE IN CO CLERK'S OFFICE
COPY HERE FOR REFERENCE

FIELD SURVEY NOTES

E-D-702 6-70 5

State of Wisconsin / Department of Transportation

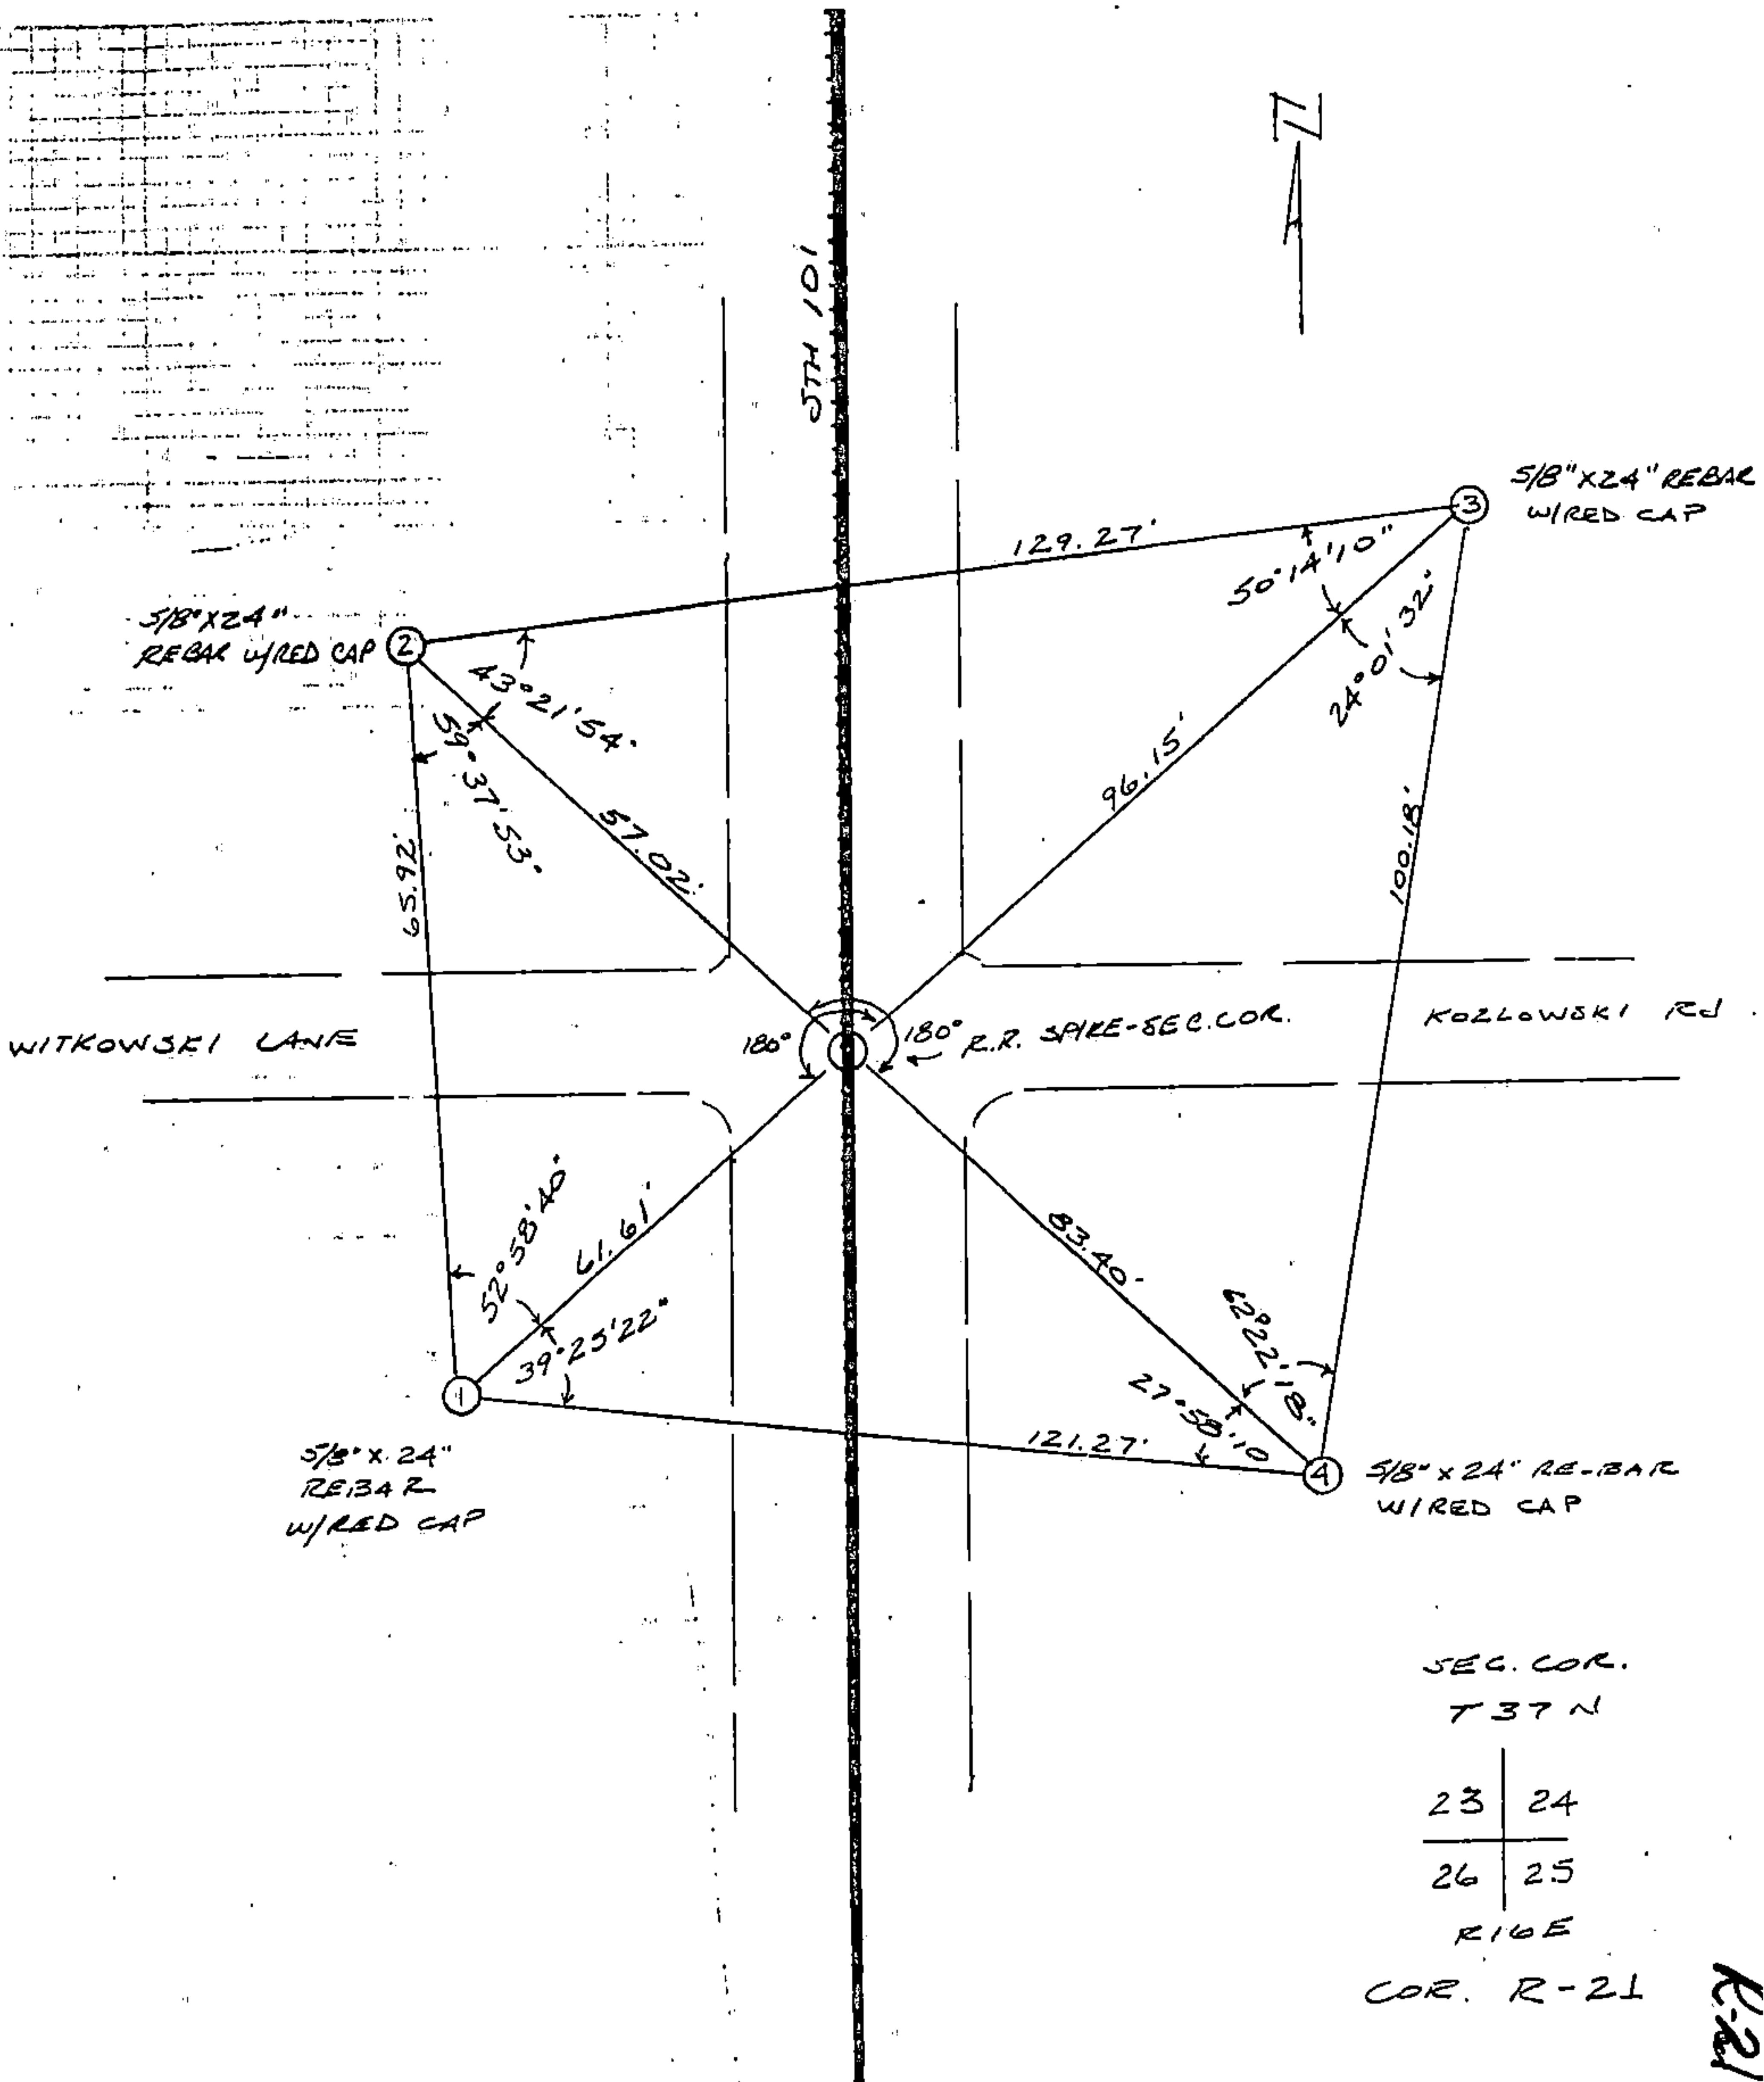

SEC. COR.
T 37 N

23	24
----	----

26	25
----	----

R 16 E

COR. R-21

43716 230000

- ☐ TOPOGRAPHY
- ☐ SURVEY ALIGNMENT

9304-03-00

5TH 10