


State of Wisconsin }
County of Forest } ss.

I, Norman A. Harrison, do hereby
certify that on the 7 th day
of July, 1991, I found
evidence of the Northwest
corner of Section 34
Township 37, North, Range
16, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

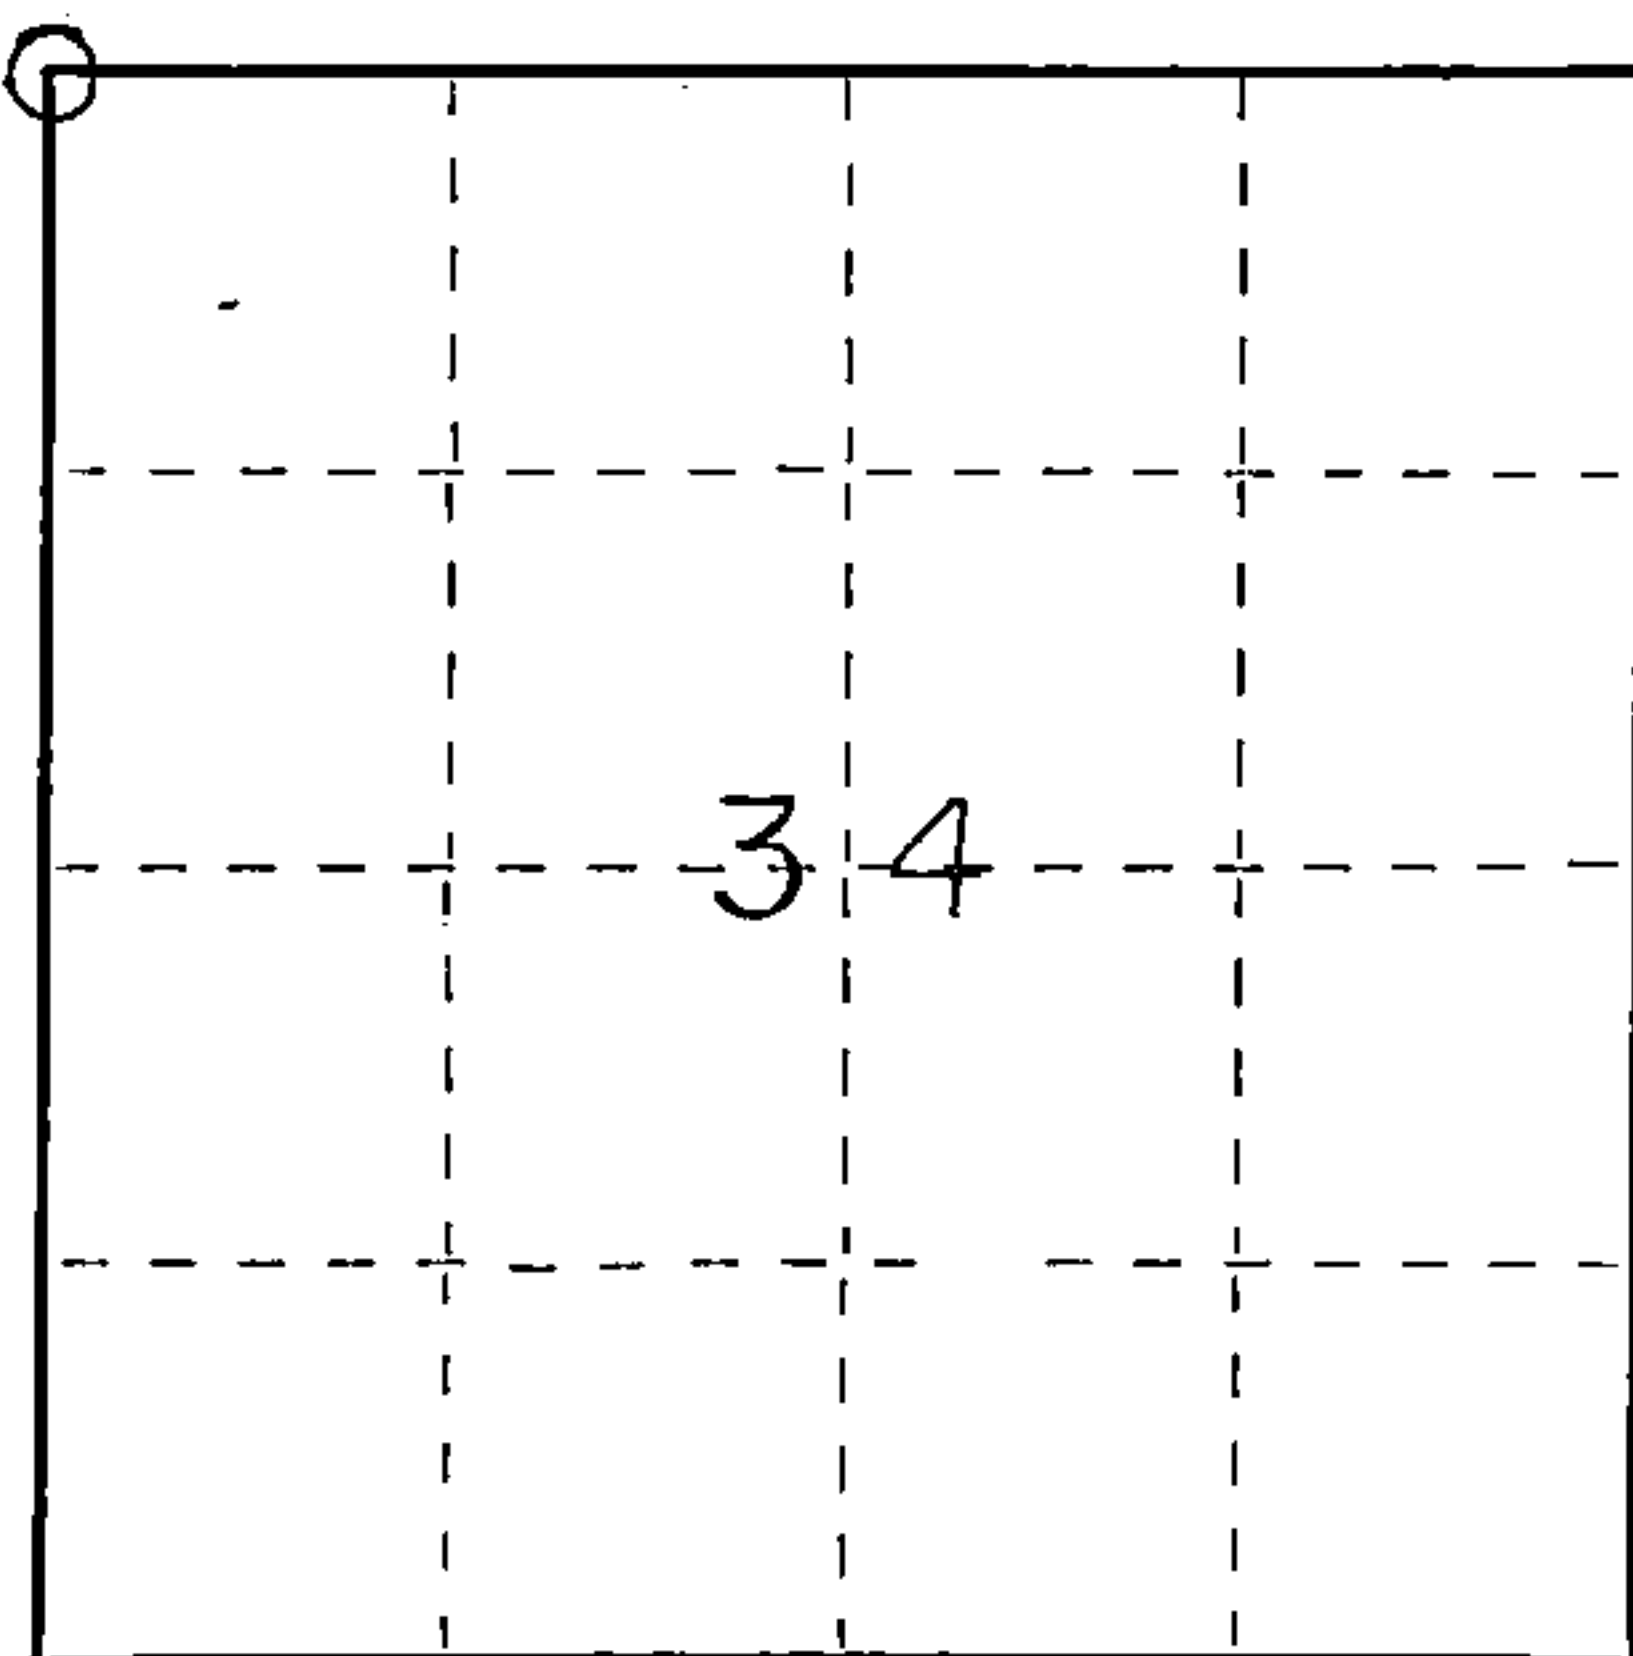

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

History of original corner establishment:

Original Survey by: James McBride

Commenced July 11, 1859. Finished July 16, 1859

original bearing trees

Hemlock 24 N 18 W 62 (40.92')

Lind 10 S 40 E 53 (34.98')

Lind 14 S 56 W 34 (22.44')

Hemlock 50 N 14 E 50 (33.0')

- B Description of corner evidence found:
found 3 way fence corner in road bed
measurement from Northeast corner = 5259.4'
measurement from West quarter corner = 2638.4' 8" red pine
- F accepted fence corner as best evidence of perpetuation
of original corner location

Description of monument and accessories I established to perpetuate the original location of this corner:

set 1"x 24" iron pipe at corner

set Forest County aluminum monument as witness monument

chisled cross in large boulder

3.0' x 3.5' x 1.5' high

set 1/2" iron pipe

set " " "

N 89° 25' E 30.58 feet

N 29° 22' W 95.05 "

S 55° 02' W 30.50 "

S 39° 27' E 43.28 "

G, H corner was not set by proportionate methods

Dated at Fence, Wis., this 10 day of Feb, 1992Signature Norman A. Harrison Title Surveyor Registration No. 1394
(County Surveyor, Registered Land Surveyor, or other duly authorized official)Office of Register of Deeds, County of Forest, I hereby certify that the within
instrument was filed in this office for record on the 5th day of March, 1992
at 3:30 o'clock P. M.Paul Achenbrenner
(Register of Deeds)

By _____ Deputy

